# 43th Anniversary

new "Cobra" line aerial bundle extractors self balancing...
new poly arch 55T
new hydro-decoking pigging units...
new idrobox x3
tube pullers...
tube bundle cleaners...
tube expander...
tube bevellers...

# IDROJET & PARTNERS TURNS WATER INTO TECHNOLOGY...

high pressure water pumps...
hydro-blasting accessories...
straddle carriers...
flex-lances tube cleaners...
dual-rotating rigid lances cleaners...
multi-lances cleaning robots...

Idrojet, Idrokid and IDM Idrodinamica delivery what competitors promise!

## THE IDROJET STORY

Idrojet S.r.l since its establishment in 1975, has experienced rapid expansion through unique technology and high quality products. Idrojet personnel has considerable experience, and this know-how is amplified by the fact that these key personnel had developed equipment and methods used productively every day.

Our factory has been making and selling various heat exchanger cleaning robots for chemical plants and oil refineries, high pressure water pumps, hydraulic tube bundle extractors and other advanced tecnological products.

Idrojet innovative philosophy is an on-going effort, so our sales and operations are continually expanding and currently enjoy an excellent world-wide reputation with installed equipment all over in the world.

In fact, our accompanying slogan "Turns water into technology..." highlights the hight quality and the high technology products that Idrojet markets worldwide. Our name is now recognized world-wide as a symbol of quality, and for this reason this slogan and our products are now so popular that some competitors have imitated it with similar ones.

Today Idrojet serve more than 40 distributors or licencees distributed all over the world and serve also directly customers regularly in over 20 other countries. This makes Idrojet the largest distributor of industrial machinery for the cleaning and the trasportation of heat exchangers, plus accessories.

More importantly, the company has earned the reputation of standing behind the products it sells. This reputation, and its leading position, has been earned by focusing on 3 main concepts:

- leading technology
- product innovation
- excellent after-sales service.

Our mission is to fulfill the above needed required system, and to do so at competitive prices; your operation is just a phone call away.

Give us a call and things will be done your way.






Idrokid s.r.l. first started in Italy at 1<sup>st</sup> Jan. 2016, as exclusive reseller of all Idrojet products worldwide, becaming leader in the particular field of industrial maintenance equipment for the extraction and trasportation of heat exchangers in oil refineries and chemical plants.

The company has already representations all around the five continents and especially in such countries as Singapore, Malaysia, Thailand, Indonesia, Korea, Japan, Spain, Portugal, Germany, Belgium, France and England where its active distributors serve customers regularly.

Besides expanding the sales team, another key measure taken to improve and greatly strengthen is our service team. Additional experienced technicians have been recruited, and the whole service team has underwent further intensive training to improve their skills, and to expand regularly this department.

With the efforts put in the next 2-3 years, Idrokid expect to improve its leading market position by the increasing large selections of model machines.

This large selection has not come at the expense of quality. Many customers buy new products from Idrokid on the basis of our serious and professional reputation to stand behind every product it sells, and on the basis of the long experience of Idrojet s.r.l in the production of special equipments in this particular field with more than 1000 bundle extractors fully engineered, design and 100% manufactered by Idrojet s.r.l. Italy.

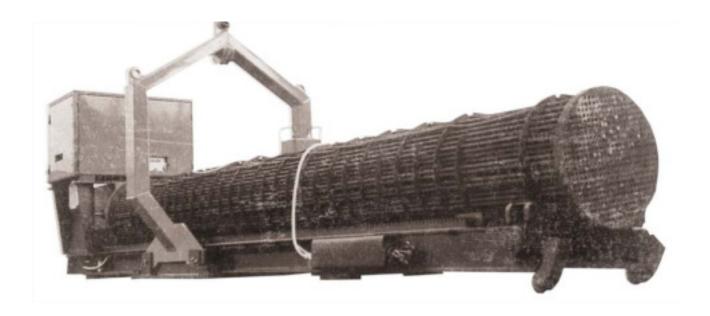



## IRS - Idro Rental Service S.r.l.

IDM - Idrodinamica Mediterranea by IRS - Idro Rental Service S.r.l., is born from the long sales experience of Idrojet and Idrokid in the special field of special equipment for the maintenance of heat exchangers, in oil refineries, chemical plants and only recently on offshore plants. Today our company is able to offer you, with all its experience, not only the rental of high technology industrial equipment, but it is also able to find out specific solutions for all your needs through well trained technicians in this particular field.

IDM - Idrodinamica Mediterranea by IRS - Idro Rental Services S.r.l., for all companies that require it, at request, can also train and certify your technicians on the use of our rental equipment!

IDM - Idrodinamica Mediterranea by IRS - Idro Rental Service S.r.l. today can offer you a wide range of rental equipment: the new Stud Double Pump Pigging Machine, high pressure water pumps, from 150 Hp to 440 Hp and from 700 atm till 2500 atm, straddle carriers, till 20 tons of weight capacity, for heat exchangers transportation and any other pipes transport, hydraulic tube bundle extractors till 45 tons of bundle weight capacity, heat exchangers internal and external pipes cleaning robots, by the use of high pressure water jets and air compressor to complete our range of machines. Safety, quality, flexibility, plus the highest technology of our equipment together with a user friendliness will permit you to carry out any single job you wish in a way that it will be the most efficient for you.

Accessories and consumable goods will be available only through a simple call! All prices, expressed in Euro, based on working days of 8 hours or weeks of 40 hours, longer working days will be quoted at your request. Additional accessories, transport charges, third party insurance operations, daily maintenance, fuel, lubricants, and any other else will be quoted separately. Our mission is to fulfill your request and to do so at competitive prices, your operations are just a phone call. Give us a call and things will be done your away!

For further information: IDM - Idrodinamica Mediterranea by IRS - Idro Rental Service S.r.l. - Via Luigi Pirandello s.n. - 95040 Piano Tavola (CT) - ITALY - Tel. +39/095/7131125 - Fax +39/095/391466 idrojet@videobank.it infoline: +39/329/8913983.



## SUGGESTED WORKING SYSTEM

Our latest philosophy suggests a system of high-technology to undertake large-scale projects within short timescales involving the maintenance of the heat exchangers. The full operation, carried out with our high technology equipment offers rapid turnaround times (until 200 tube bundles in about 18 days) and extremely safety standard.

#### **I**NTERNAL CLEANING

For the internal cleaning of heat exchangers Idrojet suggest the use of N. 2 Internal Bundle Cleaner Robots mod. Autojet I 930/5, with water jet pressure up to 1400 bar (22.000 psi).

#### EXTERNAL CLEANING

For the external cleaning of heat exchangers Idrojet suggest the use of N. 2 External Bundle Cleaner Robots mod. Autojet E 930, with water jet pressure up to 1400 bar (22.000 psi).

#### **TRANSPORT**

Heat exchangers are transported to and from cleaning area, using our Straddle Carrier Series 20T, without the need of auxiliary cranes for the positioning. In addition to transportation, this machine also lifts and positions heat exchangers on and off the extractors and moves them to and from cleaning robots on hydraulic rollers.

#### **EXTRACTION & INTRODUCTION**

We suggest the use of N. 2 "Super Idrokid", one for the removal of heat exchangers from their shells, and one for the re-fitting in their shells simultaneously.


Idrokid has various hydraulic extractors with extraction power up to 80,000 Kg. for heat exchangers up to 12,000 mm. in length and weights up to 100 tons.


## INTERNAL CLEANING OF HEAT EXCHANGERS INSIDE SHELLS


For the internal cleaning of heat exchangers inside their shells Idrojet suggest the use of N. 3 Dual Flex Lance Semiautomated Water Blasting Units mod. Autojet FX2, with two flex lances up to 1400 bar (22.000 psi).

Note: the robots for the Internal and External cleaning operate totally independently so that internal and external cleaning is done simultaneously.

## BUNDLEJET CLEANING AREA

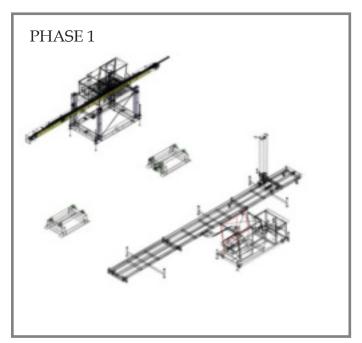

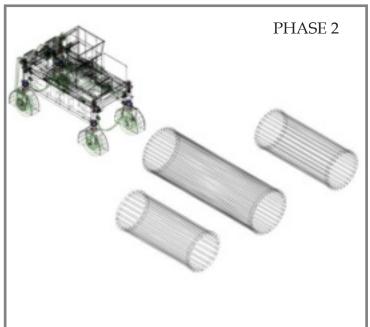

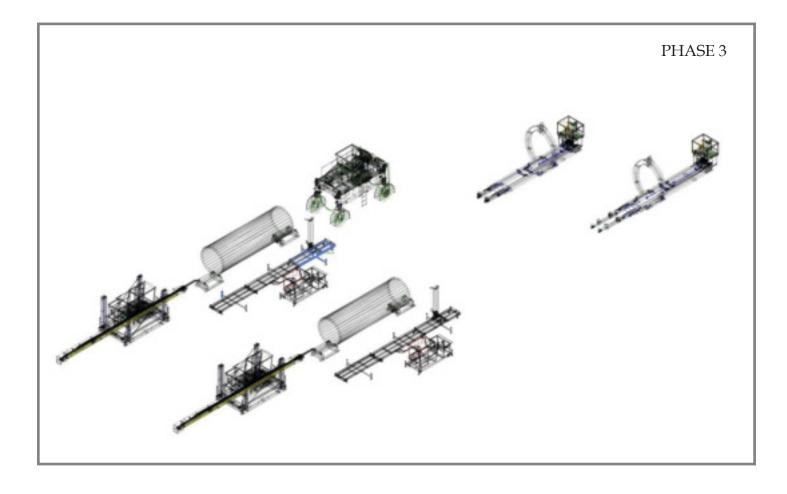

## STRADDLE CARRIER SERIES 20T

Extracted heat exchangers are transported to and from cleaning area, without the need of auxiliary cranes for positioning.

The Straddle Carrier series 20T easily transport tube bundles up to 40 Km/h and up to 20 tons of weight capacity.

The machine has been designed to be in compliance with the CE road transportation regulations, in fact its overall height, length and width are of standard size.



## PERFORMANCE DATA


Tubeless tires (12,00 x 24)	n.	4
Steering wheels	n.	4
Driving wheels	n.	2
Max translation speed	KM/h.	40
Max hill climbing	%	5
Max pressure on the soil	KG/cmq	8
Working stroke	mt.	1.30
Water cooled diesel engine	HP	128
Removable cabin		







## STRADDLE CARRIER SERIES 20T

			STANDARD MODEL 20 TON
DIMENS	ION & WHEIG	HTS	
Overall lenght OAL mm		mm	5015
Overall with O	W / Internal IW	mm	2500 / 1600
Overall height	ОН	mm	3680
Wheelbase WB		mm	3800
Overall height	w / cabin OHW	mm	3120
TP 1	Front AW / DW	mm	2050 / 2370
Tread	Rear CW / BW	mm	2050 / 2350
Min. ground c	learence HH	mm	2080
Loading capaci	ty	ton	20
Gross vehicle v	veight	Kg	7000
	CHASSIS		
Chutch			Dry, single plate w / cushioning spring
Suspension			Telescopie with spring
Brakes			Air, dual circuit, front two leading, rear two leading
Transmission			5 speed, synchromesh, floor shift control
Steering			Powered assisted
Tyres	Front		8,5 Bar
Tyles	Rear		8,5 Bar
Min. turning ra	idius approx	m	4,5
	ENGINE		OM 366
TYPE			6 Cycle, water-cooled, vertical in line, direct injection
Displacement		СС	5958
Bore & stroke mm		mm	97,5 x 133.0
Max torque (DIN) N - m (Kg -m)/rpm		pm	402 (41) / 1400
Battery V/AH		V/AH	2 x 12 / 155
Alternator V		V	24
Fuel tank capac	city	lit.	190
Oil tank capacity lit.		lit.	100







 $IDROJET\ reserves\ the\ right\ to\ change\ specifications\ and\ opntional\ features\ at\ any\ without\ prior\ notification.$ 

## AUTOJET I 930-5 series 2015

The internal cleaning robot mod. Autojet I 930-5 series 2015 is designed to clean all types and kinds of heat exchangers internal tubes. This robot works with a maximum of 5 rigid lances, which spray high pressure water, moving both in horizontally and vertically, up to 1400 bars (20,000 psi) max working pressure. Its movements are driven by hydraulic motors fed by diesel power unit, so that the machine can be manoeuvred from the control hutinside the cabin, therefore reducing the operator risks and the contact to remove the dirt.In the fully automated version all of the functions have been programmed into the memory of a small computer.

The memory of this Robot, already programmed for standard types of heat exchangers, has the capacity to expand.

to include many other types, notably shortening the operation time.

Up stroke and cross travel motion with endless screw

- -3/4 "double chain lance slide feed
- Driving lances double speed (low high)
- Ball bearing movement
- High pressure water supply with syncronized hose drum winch and rotating flitting
- Electric stroke end sensor-Free standing drive on the base plate for the hydraulic stabilization system
- Hydraulic remote control with 24V. electric distributor-Adjustable over pressure valve on the hydraulic circuit
- Hydraulic power unit with vibration mounting on frame
- 24 V. electric starter
- Oil cut-off valve
- Oil cooling system
- Oil compatible wheels for easy relocation on the job site
- Control hut with adjustable seat, opening window, windshield wiper, tool compartment.

Lenght cm.	1060
Width cm.	250
Height cm.	270
Weight Kg.	3000
Lance working stroke cm.	930
Cross travel cm.	155
Up stroke cm.	188
Number of lances	1 - 5
Lance diameter mm.	10 - 12
Flow x lance Lt.	70
Lance speed m/sec.	1 - 1.5
Force of thurst Kg.	1000
Water pressure Bar	till 1400/20000 PSI



Optional: New "Stop & Go" system fully electronic lances waterjet cleaning

#### HYDRAULIC POWER UNIT

Lenght cm.	1060
Width cm.	250
vvictii ciii.	250
Height cm.	270
Weight Kg.	3000

#### ENGINE: silent pack Hatz Diesel Mod. 2L40C

Number of cylinders	2
Cubic capacity	1716
R.P.M.	3000
Horse power	24.3 KW
Cooling system	air
Hydraulic gear pump	15-25
Oil tank	140
Oil cooling system	air



## AUTOJET SI 930/5

## **AUTOJET SI 930/5**

Lenght mm.	10600
Width mm.	2500
Height mm.	2700
Weight Kg.	3000
Water Pressure MAX Bar/Psi	1400/2000
Flow/lance Lt/min	70
Number of lance	1 -5
Jet Lance Horizontal travel mm.	9300
Jet Lance Vertical travel mm.	1880
Jat Lance Cross travel mm.	1550

IDROJET S.r.l. has introduced on the first january of 2009 a new heat exchanger multilances internal cleaning robot mod. AUTOJET SI 930/5 on scissor-lift.

This machine is designed to clean all kind of heat exchangers internal tubes with a maximum of 5 rigid lances an a cleaning site or "insitu", thanks to a scissor lift that it is able to lift this machine till 6 mt. high, and spray high pressure water jets moving both horizontal and vertical up to 1400 bar (20000psi) max working pressure.

All movements driven by hydraulic motor and fed by diesel silent-pack power unit that can be operated by both a radio wireless control box or by a wire remote control box.

Optional: New "Stop & Go" system fully electronic lances waterjet cleaning




## AUTOJET E 930 SERIES 2015

Hydraulic power unit with vibration mounting on the frame Oil cut-off valve. Oil compatible wheels for easy relocation on the job site. Control hut with adjustable seat, opening window windshield wiper, tools compartment.

Lenght cm.	908
Width cm.	92
Cabin hut height cm.	183
Column height (at working con	dition) cm. 270
Weight Kg.	2000
Number of nozzles	1/5
Flow x nozzle Lt.	70
Water pressure Bar t	ill 1400/20000 PSI
Jet lance horizontal travel cm.	900
Jet lance vertical travel cm.	185
Jet lance cross travel.	90 degress
ENGINE: silent-pack Hatz Di	iesel Mod. 1D81C
Number of cylinders	1
Cubic capacity	667
R.P.M.	3000
Horse power	10 KW
Cooling system	air
Oil tank	140
Oil cooling system	air





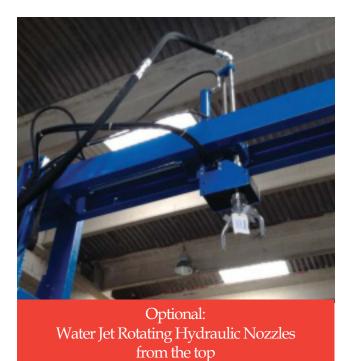



## **AUTOJET E 930 XL**

The new totally reinforced external cleaning robot mod. E 930 XL has been designed to solve the heat exchangers external cleaning job.

The water jet lances, up to 2800 bars (40,000 psi) of max working pressure, has a vertical working range of 185 cm. and an horizontal working range of 900 cm. which enables it to move closer to the bundle and to be tilted by 90 degrees. The bundle can also be rotated from the control hut, inside the cabin, by means of a hydraulic rollers system.

Lenght cm. 908	
Width cm. 92	
Cabin hut height cm. 183	
Column height (at working condition) cm. 270	
Weight Kg. 2000	
Number of nozzles 1/5	
Flow x nozzle Lt. 70	
Water pressure Bar t ill 2800/40000 PSI	
Jet lance horizontal travel cm. 900	
Jet lance vertical travel cm. 185	
Jet lance cross travel. 90 degress	
ENGINE: silent-pack Hatz Diesel Mod. 1D81C	
Number of cylinders 1	
Cubic capacity 667	
R.P.M. 3000	
Horse power 10 KW	
Cooling system air	
Oil tank 140	



- Hydraulic power unit with vibration mounting on the frame
- Oil cut-off valve
- Oil compatible wheels for easy relocation on the job site
- Control hut with adjustable seat, opening window, windshield wiper, tools compartment

## THE OUTSIDE CLEANING ROBOT E-930 XL

is made in two parts:


Oil cooling system

- the control hut with the power unit.
- the rail on wich the water-jet lance runs.

It works with 3 or more high pressure (till 2800 bar) water jets. The water jet lance has a working travel 1 of 9 mt., a vertical travel 2 of 185 cm., a cross travel 3 that gets it closer to the bundle, of 90 cm. and the possibility to be inclinated of 90 degress 4.

From the control hut can also be done the rotation of the bundle that is put on hydraulic rollers. All the movements are driven through hydraulic motors feed with a diesel power-unit.

The robot speed can be set through the gas lever or through an hydraulic valve that controls the flow-rate.

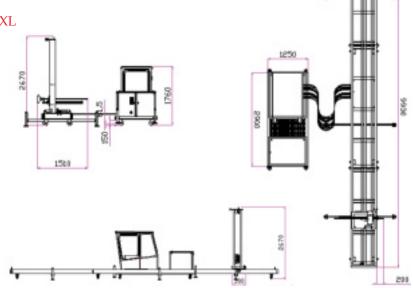

air

## **IDROBOX**



The IdroBox by Idrojet S.r.l. - Italy is a pneumatic flex-lance Heat Exchangers internal tubes cleaner robot, which is an powerful support for all companies providing cleaning of heat exchangers, among others, for heat and power plants and petrochemical factories.

Thanks to its ultralight design the safety and comfort of the operator are increased as well as efficiency. Performance of the cleaning process is increased up to 4 times compared to manual works, what leads to significant costs savings of the cleaning process.

The IdroBox by Idrojet S.r.l. - Italy allows to work with different outside diameters of flex lances without any additional tools and exchanging elements.

The IdroBox by Idrojet S.r.l. – Italy, keeps adjustable, constant speed of cleaning for the whole length of tube. Despite the small size and the weight of the device, the operator can use optional balancer to improve comfort of cleaning heat exchangers.

The modular design of the IdroBox by Idrojet S.r.l. – Italy, allows to connect a few ones into one IdroBox Combo and operate several lances at the same time with the synchronized drive.

## Standard scope of delivery includes wide range of accessories:

- IdroBox unit
- Air Treatment station with air hose 2m
- Stainless Steel Guiding tube ID 26mm, 400 mm length
- Protection rear hose 400 mm
- Specially designed flight case
- 5 sets of FIP cones, stop-ends, hose catchers for different diameter of flex-lances
- Tools,
- Additional high friction belt
- Manual.

## **Technical Specifications:**

Min. air pressure: 3,0 bar Max. air pressure: 6,3 bar

IdroBox air consumption: 600 1/min for max. speed

IdroBox lance speed (depends on air pressure supply): from 0,5 m/s to 1,4 m/s

IdroBox max. pull / push force: 220 N

Lance outer diameter (OD) 8,0 mm to 15,0 mm



## IDROBOX 2 or 3 COMBO







#### FRAME STD + CONTROL PANEL

Set including:

complete pneumatic frame with air motors + air hoses and special top bracket for shell flange, positioning guiding box, 3-way remote control panel with integrated UHP safety button and complete air treatment station, air hoses, manual.

- The frame working area: 1500 mm x 1500 mm
- The frame speed up to: 0.1 m / s
- The frame pneumatic motors max. air consumption: 1200 l/min.
- Material: Aluminum, stainless steel

#### FRAME STD:

- Ultra lightweight;
- Safe & mobility & stability by adjustable legs with wheels;
- Improved stability by special joint in the upper part of the frame:
- Easy to install by one worker;
- The modular design allows the extension of the working area;
- Fine tuning of the lance through the variable speed of the frame with fast & slow modes;
- Wide range of options eg. video surveillance;
- Corrosion resistance with anodized aluminium profiles & stainless steel components.

## **NEW TRIDROBOX**

## **Technical Specifications:**

Purpose: internal cleaning of heat exchangers

Number of lances [pcs]: 3

Possibility of vertical work: YES [only with frame "H" type]

Horizontal work: YES

Personalization of the application: YES [for individual needs]

Operating mode: automatic

Diameter lanc [OD] [mm]: 8.0 - 15.0

Min. / Max. air pressure [bar]: 3.0 / 6.3 [for each feeder] Air demand [l / min. ]: approx. 600 [for each feeder] Lance feed speed [m / s]: 0.58 - 1.4 [for each feeder]

Feed force [N]: 220 [for each feeder]

Contents: complete device with accessories, without frame





## HEAVY DUTY ROLLERS



The Idrojet, always attentive to the needs of the market, has developed different types of heavy duty rollers that vary in number of components and capacity.

During the external cleaning process of a heat exchanger, whatever type of robot you are using (external / internal), you will still need it, for a thorough and uniform cleaning, of tube bundle rollers that allow the tube bundle to rotate. Haevy duty rollers are available in sets of 2 or 3 modules and 2 to 4 rollers, each set consists of a motorized roller unit and a roller unit unguided (idle), the system is hydraulically driven from the i-930 and e-930 robot cab.

Moreover Idrojet has developed some versions of tube bundle rollers with adjustable rollers, to be able to adapt the roller module to the tube bundle, and a synchronized version that allows to rotate heavier tube bundles with ease, providing the set of with 2 or 3 motorized and synchronized modules.





#### **FEATURES**

- The rollers are driven by a hydraulic motor
- Possibility to adjust the distance between the rollers (only adjustable mod) for rollers up to 35t.
- The drive chain is positioned so that the tube bundle can protrude without compromising the chain itself.
- The bearings mounted on each side of the rollers have a capacity of 50T each, and are also covered by a fairing to avoid damage and keep the bearings clean.
- Total cleaning of the exchanger shell.

## **HEAVY DUTY TYPE:**

- 25t 2 modules with 2 rollers
- 35t 2 modules with 2 rollers
- 50t 2 or 3 modules with 4 rollers

## **AUTOJET FX2 AIR**

The Autojet mod FX2 is a dual flexible semi-automated water blasting system that cleans the internal tubes of not extracted heat exchangers, by the use of flex-lances. The FX2 removes built-up oils and minerals, using water pressure up to 2800 bars (40,000 psi), in heat exchangers tubes up to 12 meters of length. The machine is air driven, so that the operator is completely protected against injury of high pressure jets.

## **AUTOJET FX 2/3**

Lenght cm.	90
Width cm.	72
Height cm.	26
Weight Kg.	87
Lance working stroke cm.	1200 cm./39.3 feet
Lance O. diameter mm.	9.4 - 11.6
Lance I. diameter mm.	5 - 6
Lance I. diameter mm. Flow x lance Lt.	5 - 6 45 - 60

## **HYDRAULIC POWER UNIT (Optional)**

Lenght cm.	110	
Width cm.	75	
Height cm.	60	
Weight Kg.	375	
Number of cylinders 1		
ENGINE: silent pack Hatz Diesel Mod. 2L40C		
Cubic capacity	667	
1 ,	007	
R.P.M.	3000	
Horse power	10 KW	
Cooling system	air	





## **AUTOJET OV2/40PSI**


Idrojet developed a new rotating rigid lances machine up to 2800 bars (40,000 psi) of working pressure, to clean the dirtiest tubes of heat exchangers by means of 2 rotating rigid lances.

The lances boom is connected to a X-Y movement which is hydraulically powered and controlled by remote control joysticks. The Autojet OV2/40PSI can be used both in horizontal and in vertical position.


This machine is to clean hairpin and floating head bundles even in difficult places with limited space.

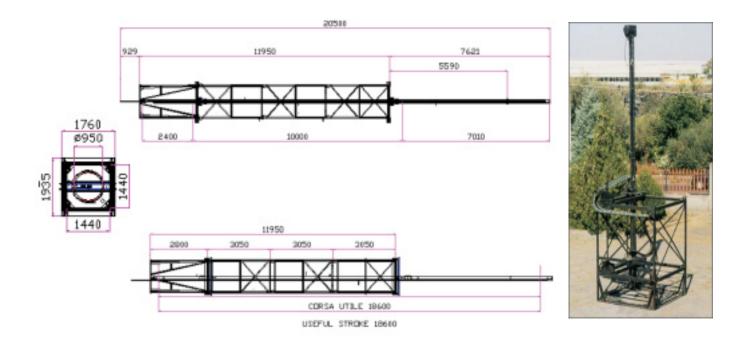



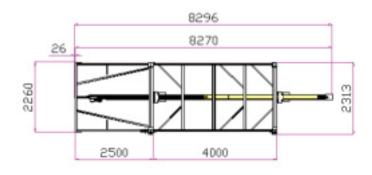





## THE IDROJET ACCESSORIES

#### ROTATING TANK CLEANING HEADS

Internal vessel, tank, autoclave or other internal equipment surfaces, when fouled of function, and inefficient, these are the conditions when our cleaning heads are utilized to restore a clean process environment.

Idrojet offer a complete line of cleaning heads for customers requirements.



## SWIVEL JOINTS AND ACCESSORIES

The latest born are our high pressure swivels up to 2800 bars (40,000 psi), totally made in stainless steel, with high quality bearings and seals, which guarantee a long life. Idrojet also offer from the




cleaning nozzle to rigid and flex lances, to ensure optimum cleaning action for various applications, in an efficient, economic and safe way.

#### FOOT-OPERATED CONTROL GUN - G SERIES

The G-Series footgun features a fully enclosed Safety Guard, increased foot pedal area to minimize operator fatigue, and to ensure positive valve operation.


"Quick Change" valve assembly allows: Field Overhaul in less than 60 seconds.



## FOOT GUN ASSEMBLY COMPLETE

G/7 (700 BAR/10000 psi MAWP) G/10 (1050 BAR/15000 psi MAWP) (1/2" NPT Inlet & Outlet Standard) G/14 (1400 BAR/20000 psi MAWP)

Simple Overhaul: Align lobe on valve assembly with groove in Dump Tube. Push in and turn clockwise to lock. Removal is simply the reverse of this procedure.



## HAND-HELD CONTROL GUNS \_ HG SERIES CARTRIDGE TYPE "QUICK CHANGE" VALVE ASSEMBLY

MODEL HG/7: PART NO: 700001 (700 BAR/ 10000 psi MAWP) COMPLETE MODEL HG/10: PART NO: 700003 (1050 BAR/ 15000 psi MAWP) COMPLETE

This hand Control Gun combines simplicity of operation and maintenance, with rugged durability. The style of the HG/7 and HG/10 has become a Water Blast Industry standard.

The shoulder stock and handgrip can be adjusted to any desired position for maximum comfort and minimum fatigue during blasting. The entire valve mechanism can be removed and replaced in the field in less than 1 minute. Operator safety is of primary importance, and for this reason an automatic safety catch is incorporated into the handle, which engages each time the trigger is released.




## INTRODUCTION OF THE NEW IDROJET STUD PIGGING SYSTEM MACHINE


Idrojet can now boast 40 years as a market leader in the field of industrial cleaning using high pressure pump. Today the company is striding ahead with new technology. IDM-IRS introduces to you a new concept for decoking refinery heaters. Using the latest technology and products we can now offer you a service that can save you time and money and make your heaters run more efficiently. The H.D.T. Pigging System uses low pressure water and specially designed range of piggs to remove carbon/coke and other deposits from your heater tubes safely. Designed by our own engineers and built by our own company we belive that by combining are knowledge-experience and planned expansion in pigging and decoking. Idrojet will become the one of the leaders in Europe.

Our trailer mounted double pump decoke units have the capacity to carry out two jobs at once.

## For example:


- One heater with two passes can be cleaned simultaneously.
- By looping passes togther even more time can be saved.

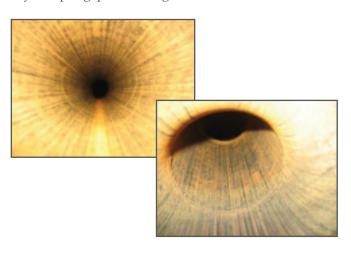



Whatever you need cleaning from the hardest heater coke to the softest pipeline build ups Idrojet can solve you problem.




















From the tickest coke build up to clean tube or pipe in the minimum of time safely and without damage.

## INTRODUCTION OF THE NEW IDROJET STUD PIGGING SYSTEM MACHINE



Idrojet S.r.l. after 40 years experience as a worldwide market leader in the field of heat exchangers industrial cleaning machines using high pressure water jets, is now striding ahead with a new technology. We are introducing you a new concept for decoking refinery heaters, using the latest technology; in fact we can now offer you a special machine that can make you save time and money and run your heaters more efficiently.

Idrojet S.r.l., together with some specialists in this special sector, have designed and built several special machines that use a combination of low pressure water and specially designed piggs to remove carbon/coke and other deposits from heater tubes, with radius bends, plug headers and box headers. Our trailer mounted double pump decoke unit have the capacity to carry out two jobs at once, as for example one heater with two passes that can be cleaned simuders, and pressure transmitters permit to clean your heaters in a bi-directional way, without any chemical product, without any heater tube damage and with a friendly environmental impact. Today we can sell you our special unit, we can train your staff to use it, since in our factory we have a complete heater for test and demo, or through our sister company, we can rent you our machine.



Decoking machine on trailer

Decoking machine on container

## INTRODUCTION OF THE NEW IDROJET STUD PIGGING SYSTEM MACHINE



## **AUTOMATIC BASKETS FOR DECOKING PROCESS**

The automatic baskets, positioned in the upper part of the decoking machine, are operated by an operator positioned inside the cabin, without the help therefore, of other operators, this allows a saving both in terms of human resources and the use of additional auxiliary means, which in the past were used for the emptying of the wastebaskets, therefore a saving in terms of time and labor costs.

All processing waste is automatically transported from the baskets to an external container through hoppers.

## NEW IDROJET PUMP UNITS "IDROENERGY" LINE



The base for heat exchangers cleaning is formed by a powerful high pressure Idrojet pump unit.

Idrojet offer a complete range of high pressure water pumps up to 1400 HP covering a range up to 2800 bars (40,000 psi) and 650 gpm.

**IDROJET BLASTERS** 

Idrojet pumps represent a new dimension of high versatility in high pressure pumping equipments.

MODEL SPECIFICATIONS

Designed to meet the requirements of: Chemical injection - Oil field service - API processing - Reserve osmosis - Mining - Water Blasting

## DIESEL & ELECTRIC MODELS

SERIES ENGINE SIZE	MODEL NUMBER	OPERATION	RATING	
100 HP SERIES	D or E- IDJ1 (14) D or E- IDJ1 (10) D or E- IDJ1 (7) D or E- IDJ1 (4)	TRIPLEX	20000 PSI @ 6,8 GPM 15000 PSI @ 9,8 GPM 10000 PSI @ 15 GPM 6000 PSI @ 24,6 GPM	1400 BAR @ 25,7 L/M 1050 BAR @ 37 L/M 700 BAR @ 56,7 L/M 420 BAR @ 92,9 L/M
150 HP SERIES	D or E- IDJ1/5 (28) D or E- IDJ1/5 (21) D or E- IDJ1/5 (14) D or E- IDJ1/5 (10) D or E- IDJ1/5 (7)	TRIPLEX	40000 PSI @ 6 GPM 30000 PSI @ 7,5 GPM 20000 PSI @ 10,7 GPM 15000 PSI @ 14,7 GPM 10000 PSI @ 21,6 GPM	2750 BAR @ 21,6 L/M 2100 BAR @ 28,3 L/M 1400 BAR @ 40,4 L/M 1050 BAR @ 55,5 L/M 700 BAR @ 81,6 L/M
165 HP SERIES	D or E- IDJ1/65 (28) D or E- IDJ1/65 (21) D or E- IDJ1/65 (14) D or E- IDJ1/65 (10) D or E- IDJ1/65 (7)	TRIPLEX	40000 PSI @ 6,3 GPM 30000 PSI @ 7,7 GPM 20000 PSI @ 12,4 GPM 15000 PSI @ 16,4 GPM 10000 PSI @ 25,6 GPM	2800 BAR @ 24
200 HP SERIES	D or E- IDJ2 (21) D or E- IDJ2 (14) D or E- IDJ2 (10) D or E- IDJ2 (7) D or E- IDJ2 (5)	TRIPLEX	30000 PSI @ 11,5 GPM 20000 PSI @ 15,6 GPM 15000 PSI @ 20,4 GPM 10000 PSI @ 35,1 GPM 8000 PSI @ 42,1 GPM	2100 BAR @ 43,5 L/M 1400 BAR @ 59 L/M 1050 BAR @ 77 L/M 700 BAR @ 132,7 L/M 560 BAR @ 159,2 L/M
220 HP SERIES	D or E- IDJ2/2 (28) D or E- IDJ2/2 (21) D or E- IDJ2/2 (14) D or E- IDJ2/2 (10) D or E- IDJ2/2 (7)	TRIPLEX	40000 PSI @ 11,5 GPM 30000 PSI @ 15,6 GPM 20000 PSI @ 20,4 GPM 15000 PSI @ 35,1 GPM 10000 PSI @ 42,1 GPM	2800 BAR @ 32
250 HP SERIES	D or E- IDJ2/5 (28) D or E- IDJ2/5 (24) D or E- IDJ2/5 (21) D or E- IDJ2/5 (14)	TRIPLEX	40000 PSI @ 6,4 GPM 35000 PSI @ 8,3 GPM 30000 PSI @ 10,8 GPM 20000 PSI @ 15,4 GPM	2800 BAR @ 23
320 HP SERIES	D or E- IDJ3 (21) D or E- IDJ3 (14) D or E- IDJ3 (10) D or E- IDJ3 (7) D or E- IDJ3 (5)	TRIPLEX	30000 PSI @ 11,5 GPM 20000 PSI @ 15,6 GPM 15000 PSI @ 20,4 GPM 10000 PSI @ 35,1 GPM 8000 PSI @ 42,1 GPM	2100 BAR @ 50,6 L/M 1400 BAR @ 77,1 L/M 1050 BAR @ 96,7 L/M 700 BAR @ 145,1 L/M 560 BAR @ 173,9 L/M
350 HP SERIES	D or E- IDJ3/P5 (28) D or E- IDJ3/P5 (21) D or E- IDJ3/P5 (14) D or E- IDJ3/P5 (10) D or E- IDJ3/P5 (7) D or E- IDJ3/P5 (5)	QUINTUPLEX	40000 PSI @ 11,3 GPM 30000 PSI @ 13,4 GPM 20000 PSI @ 22,1 GPM 15000 PSI @ 28,9 GPM 10000 PSI @ 45,1 GPM 8000 PSI @ 54,6 GPM	2750 BAR @ 42,3 L/M 2100 BAR @ 50,6 L/M 1400 BAR @ 84 L/M 1050 BAR @ 110 L/M 700 BAR @ 172 L/M 560 BAR @ 207 L/M
450 HP SERIES	D or E- IDJ4/P5 (28) D or E- IDJ4/P5 (21) D or E- IDJ4/P5 (14) D or E- IDJ4/P5 (10) D or E- IDJ4/P5 (7) D or E- IDJ4/P5 (5)	QUINTUPLEX	40000 PSI @ 15,36 GPM 30000 PSI @ 18,3 GPM 20000 PSI @ 32,5 GPM 15000 PSI @ 41,1 GPM 10000 PSI @ 61,4 GPM 8000 PSI @ 85,5 GPM	2750 BAR @ 58,4 L/M 2100 BAR @ 81,5 L/M 1400 BAR @ 123,5 L/M 1000 BAR @ 126 L/M 700 BAR @ 233,5 L/M 560 BAR @ 290 L/M

## NEW SELF-BALANCING "COBRA" LINE (PATENT. N.PCT/IT2016/00079)

## New "COBRA" line patented self-balancing.

Removal of tube bundles is essential; special hydraulic tube bundle extractor are used to extract and transport the tube banks to/from their shells.

Idrokid is at the forefront of technology in this special fileds, because its machine are born from 1000 ideas, by people that everyday pull and push tube bundles in oil refineries and chemical plants all over the world.

Idrokid is your hydraulic tube bundle extractor, super light, super easy to operate, super powerful and super clever, self-supportive, due to the use of an air-cooled diesel engine, with all hydraulic functions remotely controlled, fitted with hydraulic winch that can pull/install the most obstinate bundles in one stroke, normally in less than 15 minutes, and with the biggest range of machines in the world.



New "COBRA" line self-balancing fully electronic aerial extraction able to remove or reinstall bundle with or without your operator!




## AERIAL TUBE BUNDLE EXTRACTOR MOD: SUPER CLEVER IDROKID EXTRACTOR

The aerial bundle puller mod. "Super Clever Idrokid Extractor" weights only 4800 kg. (10.850 lb.) and is long just 7000 mm. (23 feet), but because of its light weight and due to its unique and particular construction in high resistance steel, it is able to pull

and push tube bundles till 6800 mm. (21 feet) of length, 25 tons of bundle weight up to 1600 mm. (5,25 feet) of bundle diameter.



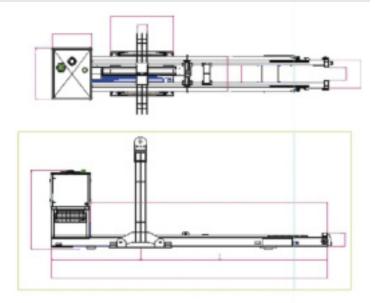

BUNDLE EXTRACTOR MACHINE	SUPER CLEVER
Length	7000 mms.
Width	1040 mms.
Height	2215 mms.
Weight (with bundle arch)	4800 Kgs.
Weight (without bundle arch)	6800 Kgs.
Maximum bundle extraction height	N/a
Minimum bundle extractor height	N/a

TUBE BUNDLE		
Length	6500	mms.
Bundle weight capacity	25000	Kgs.
Diameter	1600	mms.
Winch pull force	62000	Kgs.
Speed	2.81	m/min

PUMP	Rexroth var. delivery
ENGINE/AIR DRIVE (OPTIONA	Hatz mod. 2L41C
Cooling system	air
No. of cylinders	2
Cubic capacity	1716cc
RPM	3000
Horse power	33
PACKING	40' Dv cont
PRICE EU	IRO Poa







## AERIAL TUBE BUNDLE EXTRACTOR MOD: SUPER IDROKID EXTRACTOR

The aerial bundle puller mod. "Super Idrokid extractor" weights only 5400 kg. (11.900 lb.) and is long 8000 mm. (26,3 feet), but due to its unique and particular construction in high resistance steel, it is able to pull and push tube bundles till 7700 mm. (25,26 feet) of

length, 35 tons of bundle weight up to 2000 mm. (6,56 feet) of bundle diameter with a pullingforce of 62 tons.



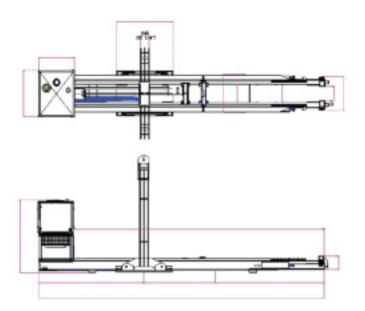

BUNDLE EXTRACTOR MACHINE	SUPER IDROKID
Length	8000 mms.
Width	1240 mms.
Height	2315 mms.
Weight (with bundle arch)	5400 Kgs.
Weight (without bundle arch)	7400 Kgs.
Maximum bundle extraction height	N/a
Minimum bundle extractor height	N/a

TUBE BUNDLE	
Length	7700 mms.
Bundle weight capacity	35000 Kgs.
Diameter	2000 mms.
Winch pull force	62000 Kgs.
Speed	2.8m/min
PUMP	Rexroth var. delivery

1 GIVII	Rexioni var. delivery
ENGINE/AIR DRIVE (OPTIONAL)	Hatz mod. 2L41C
Cooling system	air
No. of cylinders	2
Cubic capacity	1716cc
RPM	3000
Horse power	33
PACKING	40' Dv cont
PRICE EURO	Poa







## AERIAL TUBE BUNDLE EXTRACTOR MOD: SUPER IDROKID EXTRACTOR/2

The aerial bundle puller mod. "Super Idrokid Extractor/2" weights only 5600 kg. (12.340 lb.) and is long 8000 mm. (26,3 feet), but due to its unique and particular construction in high resistance steel, it is able to pull and push tube bundles till 7700 mm.

(25,26 feet) of length, 45 tons of bundle weight up to 2000 mm. (6,56 feet) of bundle diameter with a pulling force of 62 tons.



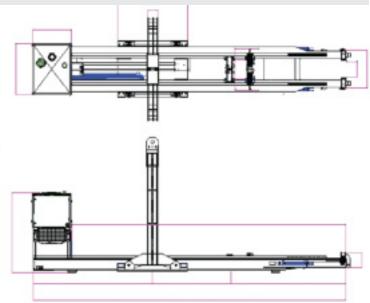

BUNDLE EXTRACTOR MACHINE	SUPER IDROKID/2
Length	8000 mms.
Width	1240 mms.
Height	2315 mms.
Weight (with bundle arch)	5600 Kgs.
Weight (without bundle arch)	7600 Kgs.
Maximum bundle extraction height	N/a
Minimum bundle extractor height	N/a

TUBE BUNDLE	
Length	7700 mms.
Bundle weight capacity	45000 Kgs.
Diameter	2000 mms.
Winch pull force	62000 Kgs.
Speed	2.8m/min
РИМР	Rexroth var. delivery

PUMP	Rexroth var. delivery
ENGINE/AIR DRIVE (OPTIONAL)	Hatz mod. 2L41C
Cooling system	air
No. of cylinders	2
Cubic capacity	1716cc
RPM	3000
Horse power	33
PACKING	40' Dv cont
PRICE EURO	Poa







## AERIAL TUBE BUNDLE EXTRACTOR MODEL: MEGA IDROKID EXTRACTOR

The aerial bundle puller mod. "Mega Idrokid Extractor" weights only 5800 kg. (12.790 lb.) and is long 10000 mm. (32,8 feet), but due to its unique and particular construction in high resistance steel, it is able to pull and push tube bundle till 9500 mm.

(31,17 feet) of length, 45 tons of bundle weight up to 2000 mm. (6,56 feet) of bundle diameter with a pulling force of 62 tons.





BUNDLE EXTRACTOR MACHINE	MEGA KID
Length	10000 mms.
Width	1440 mms.
Height	3315 mms.
Weight (with bundle arch)	5800 Kgs.
Weight (without bundle arch)	7800 Kgs.
Maximum bundle extraction height	N/a
Minimum bundle extractor height	N/a

TUBE BUNDLE	
Length	9500 mms.
Bundle weight capacity	45000 Kgs.
Diameter	3000 mms.
Winch pull force	62000 Kgs.
Speed	2.8m/min
	<del></del>

PUMP	Rexroth var. delivery
ENGINE/AIR DRIVE (OPTIONAL)	Hatz mod. 2L41C
Cooling system	air
No. of cylinders	2
Cubic capacity	1716cc
RPM	3000
Horse power	33
PACKING	40' Dv cont
PRICE EURO	Poa







## AERIAL TUBE BUNDLE EXTRACTOR MODEL: SUPER MEGA IDROKID EXTRACTOR

The aerial bundle puller mod. "Super Mega Idrokid Extractor" weights only 6200 kg. (13.670 cb.) and is long 11000 mm. (35,8 feet), but due to its unique and particular construction in high resistance steel, it is able to pull and push tube bundle till 10500 mm.

(33,17 feet) of length, 65 tons of bundle weight up to 3000 mm. (3,84 feet) of bundle diameter with a pulling force of 62 tons.





BUNDLE EXTRACTOR MACHINE	SUPER MEGA KID
Length	11000 mms.
Width	1440 mms.
Height	3315 mms.
Weight (with bundle arch)	6200 Kgs.
Weight (without bundle arch)	8200 Kgs.
Maximum bundle extraction height	N/a
Minimum bundle extractor height	N/a

TUBE BUNDLE	
Length	10500 mms.
Bundle weight capacity	65000 Kgs.
Diameter	3000 mms.
Winch pull force	62000 Kgs.
Speed	2.8m/min

РИМР	Rexroth var. delivery
ENGINE/AIR DRIVE (OPTIONAL)	Hatz mod. 2L41C
Cooling system	air
No. of cylinders	2
Cubic capacity	1716cc
RPM	3000
Horse power	33
PACKING	40' Dv cont
PRICE EURO	Poa







## AERIAL TUBE BUNDLE EXTRACTOR MODEL: SUPER BIG IDROKID EXTRACTOR

The aerial bundle puller mod. "Super Big Idrokid Extractor" weights only 8800 kg. (16.870 cb.) and is long 12000 mm. (39,8 feet), but due to its unique and particular construction in high resistance steel, it is able to pull and push tube bundles till 11500

mm. (37,45 feet) of length, 100 tons of bundle weight up to 3200 mm. (4,84 feet) of bundle diameter with a pulling force of 100 tons.



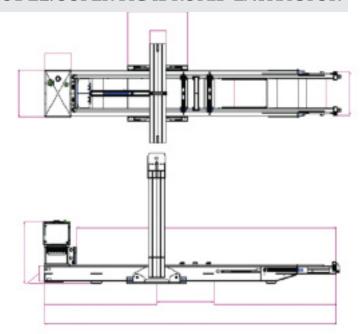

BUNDLE EXTRACTOR MACHINE	EXTRA BIG KID
Length	12000 mms.
Width	1750 mms.
Height	5000 mms.
Weight (with bundle arch)	8800 Kgs.
Weight (without bundle arch)	10800 Kgs.
Maximum bundle extraction height	N/a
Minimum bundle extractor height	N/a

TUBE BUNDLE	
Length	11500 mms.
Bundle weight capacity	100000 Kgs.
Diameter	3200 mms.
Winch pull force	100000 Kgs.
Speed	2.8m/min

Speed	2.8m/ min
PUMP	Rexroth var. delivery
ENGINE/AIR DRIVE (OPTIONAL)	Hatz mod. 2L41C
Cooling system	air
No. of cylinders	2
Cubic capacity	1716cc
RPM	3000
Horse power	33
PACKING	40' Dv cont
PRICE EURO	Poa





## NEW AERIAL BUNDLE EXTRACTOR FROM 25 TONS TILL 100 TONS

Idrokid is able to remove and reinstall 100% of the tube-bundles in common petroleum refinery use, with great easiness in cheap way.

The hydraulic tube bundle extractor, super light, super easy to operate, super powerful, super clever.

Idrokid's hydraulic system brings the convienience to change the pulling force automatically:

it encrease the power and at same time decreases the speed and viceversa.

Idrokid extractor is a the forefront of technology, because it is born from 1000 ideas, by peoples that everyday pull and push tube bundles in oil refineries and chemical plants all over the world.





Hydraulic V-Block Trolley (optional)

Wireless remote control box (optional)

SPECIFICATIONS	SLIDER CLEVER	SLIBER IDROVID	SUPER IDROKID/2	MECA IDROKID	SUPER MEGA IDROKID	SUPER BIG IDROKID
BUNDLE EXTRACTOR MACHINE	301 EICELVEIC	SCI LIVIDICINID	SCI EN IDNONIDJ2	WILCHTIDACKID	IDROND	IDRORID
Length	7000 mms.	8000 mms.	8000 mms.	10000 mms.	11000 mms.	12000 mms.
Width	1020 mms.	1220 mms.	1220 mms.	1440 mms.	1540 mms.	1640 mms.
Heigth	2215 mms.	2315 mms.	2315 mms.	3315 mms.	3315 mms.	3615 mms.
Weigth (without arch)	48000 kgs	5400 mms.	75600 mms.	5800 mms.	6800 mms.	9800 mms.
TUBE BUNDLE		,				
Length	6500 mms	7700 mms.	7700 mms.	9700 mms.	10700 mms.	11700 mms.
Weigth at max. heigth 7000mm	25000 kigs.	35000 kgs.	45000 kgs.	45000 kgs.	65000 kgs.	100000 kgs.
Diameter	1600 mms.	2000 mms.	2000 mms.	2000 mms.	3000 mms.	3200 mms.
Winch pull force	62000 / 100000 kgs.					
Speed	2.8 m / min					
PUMP	REXROTH VAR. DELIVERY					
ENGINE AIR DRIVE	HATZ MOD. 2L41C					
Cooling system	AIR RADIATOR					
No. of cylinders	2					
Cubic capacity	1716 CC.					
RPM	3000					
Horse power	33					

on all models side ext. 400 mm. and front side ext. 1000 mm. long



## NEW PULL AND PUSH

No more Fork Lift or traditional way with small cranes to Pull and Push tubes or small tubes bundles in oil refinery or chemical plants!

The unit is self supportive, due to the use of an air cooled Hatz diesel engine, it needs just a crane to be lifted into position. The engine, equipped with a spark arrestor in order to be used also in hazardous areas, drives an hydraulic pump and is equipped with an hydraulic winch that can Pull and Push the most obstinate tube and/or tube bundle in one stroke, normally in less than 10 minutes!

All hydraulic functions are remotely controlled, allowing a reduction in personnel and increasing the safety of the operators.

When the tube or the tube bundle is completely on the machine, the load is balanced using an hydraulic cylinder. Furthermore, due to the slim and super light construction of the balancing system, accessibility to the tube or the heat exchanger and its surrounding obstacles is increased, and there is no need anymore to disassembly the superstructure while lifting the tube bundle or the tube out from the chassis of the machine.

Max Winch pulling/pushing force up to 20 tons and hydraulic power pack supplied with Hatz diesel engine and spark arrestor.





15 TONS

## SPECIFICATIONS

PULL AND PUSH	5 TONS
Lenght of "P&P"	6600 mm./ 21,65 feet
Maximum Height	1880 mm./ 74 Inches
Width of "P&P" (without arch.)	800 mm./ 32 Inches
Weight of "P&P (unloaded)	1600 Kg./ 3500 Inches
Maximum bundle lenght	6000 mm/ 20 feet
Maximum bundle diameter	1000 mm / 40 Inches
Maximum winch pulling force	10000 Kg./ 22046 Ibs
Maximum bundle weight	5000 Kg./ 11000 Ibs
Winch pulling speed	2500 mm/min. / 8,2 feet/min.
Pump working pressure	200 Bars / 2900 psi
ENGINE/AIR DRIVE (OPTIONAL)	HATZ model 1D90W
Cooling system	air
No. of cylinders	1
Cubic capacity	722 CC
RPM	3000
-	

10 TONS
7000 mm./ 23 feet
1880 mm./ 74 Inches
1000 mm./ 40 Inches
1800 Kg./ 4000 Inches
6400 mm/ 21 feet
1000 mm / 40 Inches
10000 Kg./ 22046 Ibs
10000 Kg./ 22046 Ibs
2500 mm/min. / 8,2 feet/min.
200 Bars / 2900 psi

200 bars / 2900 psi
HATZ model 1D90W
air
1
722 CC
3000
16 HP

7400 mm./ 25 feet
1880 mm./ 74 Inches
1500 mm./ 48 Inches
2000 Kg./ 4400 Inches
7000 mm/ 23 feet
1500 mm / 60 Inches
10000 Kg./ 22046 Ibs
15000 Kg./ 33100 Ibs
2500 mm/min. / 8,2 feet/min.
200 Bars / 2900 psi

HATZ model 1D90W
air
1
722 CC
3000
16 HP

#### 20 TONS

7400 mm./ 25 feet
1880 mm./ 74 Inches
1600 mm./ 52 Inches
2000 Kg./ 4400 Inches
7000 mm/ 23 feet
1600 mm / 63 Inches
10000 Kg./ 22046 Ibs
20000 Kg./ 44092 Ibs
2500 mm/min. / 8,2 feet/min.
200 Bars / 2900 psi

HATZ model 1D90W
air
1
722 CC
3000
16 HP

Horse power

16 HP


## TRUCK MOUNTED BUNDLE EXTRACTOR MODEL: IK TRUCK 25

Our Truck Mounted Bundle Extractor is completely self-sufficient. It travels at highway speeds mounted on a cab over truck eliminating trasportation cost. Its capabilities once onsite enables our extractor to pull, transport to a cleaning location and unload the bundle without the assistance of other trucks or cranes. The main advantages of this machine are that pulling and reinstalling bundles can be faster, easier, safer and cheaper.



## TECHNICAL DATA


Maximun working height	7000 mm./23 feet
Minimum working height	610 mm./2 feet
Maximum bundle diameter	2000 mm./6,56 feet
Maximum bundle weight (at minimum height of extraction)	25.000 Kg./55.080 Ib.
Maximum bundle weight (at maximum height of extraction)	22.000 Kg./48,501 Ib.
Maximum bundle lenght	7700 mm./25 feet
Maximum pulling force	62.000 Kg./136.686 Ib.
Winch pulling speed	2.8 mt./min 91,8 feet/min

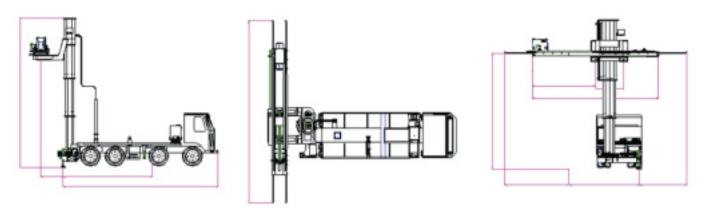

## TRAILER BUNDLE EXTRACTOR MODEL: TLBEX IK25

The new born in Idrojet factory is the trailer lift bundle extractor mod. "TLBEX IK22", that is able, since it is assembled on a special trailer, to be easy positioned to pull and push one tube bundle without any auxiliary crane. At the end of the pulling/inserting operations, the machine can be easily transported, by the use of a common tractor, positioned in front of another heat exchanger and ready to restart its job, while the tractor will be free to do another service. The machine, in fact is self-sufficient, thanks to an hydraulic power unit and a remote control by the use of joysticks.

The TLBEX IK22 can reach 7000 mm. (23 feet) high from the ground and can pull/push heat exchangers till 8000 mm. (26,3 feet) of length and 20 tons of weight, with a pulling force of 62 tons.

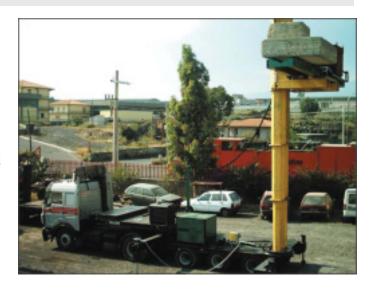

SPECIFICATIONS	TLBEX IK25
BUNDLE EXTRACTOR MACHINE	
Length	8000 mms.
Width	1220 mms.
Height	N/a
Weight	14000 Kgs.
Maximum bundle extraction height	7000 mms.
Minimum bundle extractor	610 mms.
TUBE BUNDLE TUBE BUNDLE	
Bundle Length	7700 mms.
Weight at maximum height	25000 Kgs.
Weight at minimum height	25000 Kgs.
Diameter	2000 mms.
Winch pull force	62000 Kgs.
Speed	2.8m/min
PUMP	Rexroth var. delivery
ENGINE/AIR DRIVE (OPTIONAL)	Hatz mod. 2L41C
Cooling system	air
No. of cylinders	2
Cubic capacity	1716cc
RPM	3000
Horse power	33
PACKING	40′ O/T
PRICE EURO	Poa

## SELF PROPELLED BUNDLE EXTRACTOR MODEL: SPBE IKDSME25 LIGHT TYPE

Idrojet has designed and projected a new self propelled bundle extractor especially suitable for off-shore platform plants.

This machine is in fact able to pull and push bundle up to 25 tons of weight, 8000 mm. of length (26,3 feet) at 6,5 meters of maximum height (21,3 feet) self-sufficient, thanks to an hydraulic power pack unit and remotely controlled by the use of joysticks.


All wheels can turn up to 180° in both directions and can drive at same time in both directions, like a toy for childrens.


Further, the weight of the machine, only 13 tons, its engine, modified for hazardous areas, and its hydraulic air controlled joysticks, make this machine perfect for the use in platform offshore plants.




















## SELF PROPELLED BUNDLE EXTRACTOR MODEL: IK SELF 40 - HEAVY TYPE

This extractor is the state of the art technology in the field of industrial maintenance equipment, because it combines all properties of the truck mounted bundle extractor and of the trailer lift bundle extractor. Just try one of our models for the first time and this will become your thrusted hydraulic tube bundle extractor!

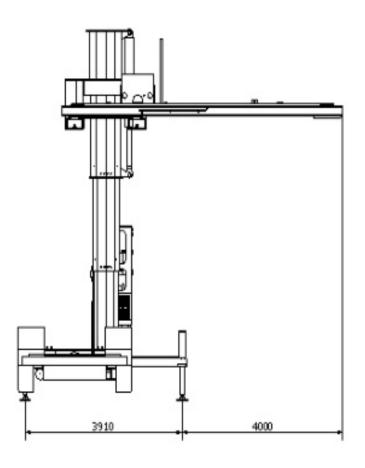





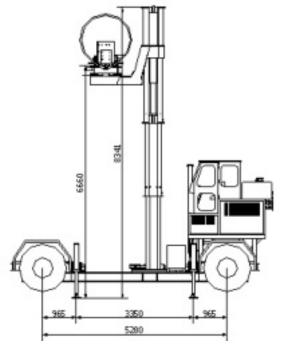

## IDROKID HIGH-TECH FOR HEAT EXCHANGER TUBE PULL/PUSHING

## IDROKID HIGH TECH TUBE PULLING/PUSHING

IDROKID today can offer you a wide range of hydraulic devices dedicated to partial or complete pulling of heat exchanger tubes, manual or semi-automated, to be used on site or in-house, plus tube rolling equipments, tube expander, tube bevelling and tube cleaning tools, and of course hydraulic tube bundle extractors.





## CATALIST BOTTOM REMOVAL MODEL: SUPERGAS

IDROJET has development in cooperating with a local engineering contractor a new revolutionary machine to open the bottoms of the reactor installed in the re-gasifyng plants, when it is necessary to open them in order to remove and change the catalyst holded inside these special reactors.

Since these reactors are usually situated at very high level from the ground, we developed a special scissor-lift the is able to approch the bottom of the reactor and move it down on the ground level, all by the use of joysticks on the



remote control box, and of course, the all machine is driven by an hydraulic power pack with an air explosion-proof engine for a better labour safety we built two models:


Model super-gas 1 for a max weight capacity of 10 ton at a maximum height of 7 mt.

Model super-gas 2 for a max weight capacity of 22 ton at a maximum height of 12 mt.

## TUBE PULLERS

## HTP 500

## Hydraulic tube puller ACCESSORIES TO BE USED WITH HTP 500 MANU AND HYDROPULL 500 GUNS

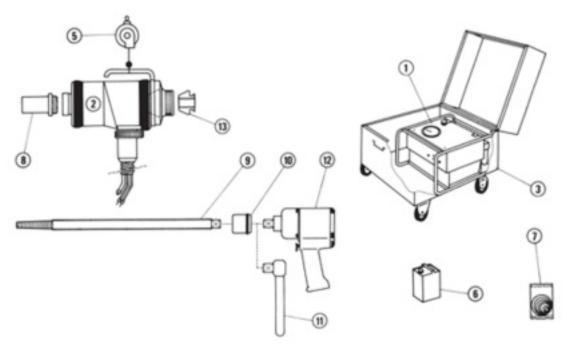

1 - HW 8000 air powerd hydraulic pump; 2 - HTP 500 gun(hydraulic clamping); 3 - Wheel mounted storage case; 4 - Balancer; 5 - Special oil; 6 - Set of spare O-rings; 7 - HTP 300 collar (according O.D. tube); 8 - HTP 400 mandrel (according I.D. tube); 9 - Socket; 10 - Ratchet wrench (1" square drive); 11 - Impact wrench (1" square drive); 12 - Set of jaws (according to madrel diameter); 13 - Spare parts for 2 years service.

	CTP 900	CTP 1100
STANDARD JAWS DIAMETER	12,5 ▶ 30 mm*	30,5 ▶ 50 mm*
MAXIMUM STROKE	60 mm	100 mm
PULLING FORCE	13 t	31 t
LENGTH WITHOUT ACCESSORY	~ 360 mm	≈ 540 mm
BODY DIAMETER	100 mm	106 mm
WEIGHT	22,5 kg	27 kg
WORKING PRESSURE	300 bar maxi	700 bar maxi
SPRING BALANCER	C 15	F 28
AIR POWERED HYDRAULIC PUMP	HW 8000	HW 8000

\* other dimensions on request

## TUBE EXPANDERS

## Condeser expander

	Model	Rolling length (mm)	Expansion (mm)
	900 C	6 ▶ 15	3,8 ▶ 9
	900 L	15 ▶ 28	6,1 ▶ 9
-	1300 C	15 ▶ 75	5,8 ▶ 9
	1300 L	28 ▶ 87	5,8 ▶ 9
-	800 C	10 ▶ 32	8,2 ▶ 37,3
	800 L	25 ▶ 51	11,4 ▶ 37,3
	1200 C*	10 ▶ 130	8,2 ▶ 37,3
	1200 L*	25 ▶ 150	11,4 ▶ 37,3
-	1400*	12 ▶ 100	34,7 ▶ 74,9

<sup>\*</sup> Extended lengths on request

## Boiler expander

Expansion (mm)	Rolling length (mm)	Model	
28 ▶ 108	30 ▶ 100	KSB (Expander/Flarer)	
27,8 ▶ 78	12 ▶ 120	P2000	
28 ▶ 108	30 ▶ 100 (non adjustable)	B15Z (Fixed thrust collar)	
Sugar pan	expanders	SEP	

## TUBE ROLLINGS

## Pneumatic rolling machines

These machines control expansion by accurate measurement of torgue.

They automatically stop the expansion at the predeterminates setting wich guarantees a uniform tight tube joint.

The cast aluminium housing ensures easy handling and less fatigue to operator.

All these pneumatic rolling machines include torque sensing cams designed for tube expanding applications.

Model	
720	
850	
1050 1550 - 1850	26
2055 1753 - 1752	- Alexander

## Electric rolling machines

Programmable expandig system, enabling automatic or semi-automatic opration.

The absorbed power control guarantees the regularity of the rolling torque.

The main information of each cycle are memorized (heat exchanger, cycle number, date, power, result etc..)

## Model

Dudgeonneuses TC 42

> Coffret de contrôle TCM B1

Supports pour TC 42



## **TESTING PUMPS**



# Electric motor or internal combustion engine driven testing pumps

Motor pumps are driven by an electric motor or a combustion engine. The combustion engine, gasoline or diesel type, makes the pump autonomous, and enables its use far from any power sources.

These pumps deliver a constant flow up to the maximum pressure. All motor pumps are supplied <<Ready for use>> on a wheel carrying tubular frame including a pressure gauge, a pressure regulator, a shut-off valve, a drain valve and flexible horse of 10 meters long.



## Hand operated testing pumps

Autonomous and very cheap, they are manly for testing small volumes.

All our hand operated testing pumps are delivered <<Ready to be used>> with a tank(expect the PEM 30), a pressure gauge, a drain valve and a flexible hose of 5 meters long, (1 meter for a PEM 30 and 2 meters for PEM 40).

## Air opearted testing pumps

Most currently used, they are reliable and operate from standard water network and compressed supply. They car be used in hazardous environment. THE <<HL>> Range (high flow) suits a direct test o small volumes and enables the testing pressure, of large pipeworks and volume. All our operated testing pumps are delivered <<Ready to be use>> in a protection tubular frame, with an air treatment device, a high and low pressure gauge and drain valve. The types L, LC and HL are also fitted with stuff-off valve, an emergency safety button, and a flexible hose of 10 long. LC and HL types are on wheel carrying frame.



## POLYARCH 55T





GENERAL ITEMS **LENGTH** 3426 mm / 11.24 ft. LENGTH (maximum opening) 4630 mm / 15.20 ft **HEIGHT** 3640 mm / 143 in. WEIGTH  $\sim$  4800 Kg / 10.600 lb. MAX DIAMETER CAPACITY 2500 mm / 98 in. MAX WEIGTH CAPACITY 55000 Kg / 121.250 lb. 1380 mm / 54 in. WIDTH PARALLEL WORK CONFIG. WIDTH CROSSING WORK CONFIG. 3842,50 mm / 151 in.

Idrokid Poly Arch 55T is the art of tecnology, newly designed to be used as an integral part of your bundle extractors, as an arch, or when disconnected from Idrokid bundle pullers can act to to lift tubes bundles or any other parts of oil refineries or chemical plants.

Designed to operate with the crane for lift tube bundles heat exchangers or other pieces, or attached to aerial extractor of tube bundles to be able to move the aerial extractor with or without tube bundles heat exchangers.

Four indipendent arms are able to work parallel or at 90° angle between each arms, to be changed from the wireless control box.

ENGINE	
MODEL	HATZ 1D90Z
CYLINDERS	1
HP	16
CAPACITY	722 cc
COOLING SYSTEM	Air

## POLYARCH 55T



All hydraulic functions are controlled by a wired controller and a wireless system to ensure greater operator safety.

## **♦** SAFETY

The machine is completely self-sufficient, and due to wireless remote-control box, you can control every single movement, at a safety distance.

## **FOUR ARMS**

It is constituted from 4 mechanical arms connected to a hydraulic unit and a motor compartment.

## **SAVING AND SECURITY**

It is hydraulically assisted thus allowing staff reductions and increasing safety.

## **PUMP FOR LIFTING WORKS**

The machine is provided with an hydraulic pump with 250 bars working pressure which allows a strong force to do any job.

Poly Arch can adjust the arms in parallel or crossover configuration, according to the needs.

In addition to standard use as a clamp-lift, it can be used as a balancing arch for tube bundle extractors.

The unit is self-sufficient thanks to the use of an air-cooled HATZ diesel engine.

**Building Materials** 

All metallic parts are treated and painted for preventing the corrosion. For the metallic sections it has been used differently material. Aldur 700

Fe 510



## WRENCH (COMING SOON)



NEW PROFESSIONAL

# WRENCH



## INTRODUCTION OF IDROJET/IDROKID WORLDWIDE COMMERCIAL NETWORK

We first would like to thank you every distributor in the past in promoting the Idrojet and Idrokid brands. Your efforts have resulted in a growing total sales.

Exibitions: WJTA Conference and Expo, Ahoy Rotterdam - Holland Maintenance Exibitions, NPRA Maintenance show.

## **EUROPE**

#### **FINLAND**

ESLEYHTIO Oy Ahjokatu 13, FIN-40320, Jyvaskyla, FINLAND

Phone: 00358/14/271500 - Fax 00358/14/271200

E-mail: info@esleyhtio.fi

#### FRANCE - ALGERIA

TCEM - Technologies et Conception d'Equipments de Manteinance

58, Rue Du General Chanzy, 76086 - Le Ĥavre - France Phone: (+33) 2/35256180 Fax (+33) 2/35253666

Website: www.tcem.fr E-mail: martial.herrero@tcem.fr

Zisimopoulos & Co. Ltd

Industrial Park Shisto (Vipa), Block 7, 3rd Road, 18863, Perama

Phone: (+30) 2104412004 Website: www.zisimopoulos.gr E-mail:info@zisimopoulos.gr

#### **GERMANY - AUSTRIA**

HERA MAINTENANCE GMBH Emil - Zimmermann - Allee 86

45891 Gelsenkirchen, GERMANY - Austria Phone: 0049/209/701080 - Fax 0049/209/7010817

#### **HOLLAND - BELIGIUM**

Calder Ltd

Prescott Drive, Worcester, wr4 9ne - United Kingdom

Phone: (+44) 1905759090 Website: www.calderltd.com E-mail: steve.sharp@calder.com

## ITALY - SWITZERLAND

PTC S.r.l.

Via F.lli Capena, 132 f - 16010 Serra Ricoo' - Genova

Phone: (+39) 0106509422 Website: www.ptcitaliana.com E-mail: paulli@ptcitaliana.com

Ponar Pressure Sytem S.A

Świerczewskiego 10A43-170 Łaziska Górneynacka 5 - Poland

Phone: (+48) 32 323-34-58 - Fax (+48) 586991223

Website: www.ponar-pressure.pl

#### **ROMANIA - BULGARIA**

S.C. Woma Ecoserv s.r.l. Berceni 106, Prahova - Romania

Phone: / Fax (+40) 244/470018 Website: www.womaecoserv.ro

## SPAIN - PORTUGAL - TURKEY

Idrokid s.r.l.

95040 Via Luigi Pirandello s.n. Piano Tavola (CT) - Italy

Phone: (+39) 095 7131125 Website: www.idrokid.com E-mail: info@idrokid.com

#### SWEDEN - NORWAY

AQUAJET SYSTEMS AB - Brunnsvagen 15

SE-570 15 Holsbybrunn, SWEDEN

Phone: 0046/383/50801 - Fax 0046/383/50730

E-mail: aquajet@aquajet.se

## UNITED KINGDOM - IRELAND - DENMARK

Calder Ltd

Prescott Drive, Worcester, wr4 9ne - United Kingdom

Phone: (+44) 1905759090 Website: www.calderltd.com E-mail: steve.sharp@calder.com

## NORTH AMERICA

## U.S.A. & CANADA

C & K SERVICES, L.L.C.

109 Bent Water Bay Drive 77356 Montgomery TX U.S.A.

Phone: 001 936 7773617 E-mail: ccleveland49@gmail.com

## CENTRAL AMERICA

#### MEXICO AND CENTRAL AMERICA

Woma De Mexico

Av. Industrial Electrica 14, Parque Industrial Tlatilco,

53470 Naucalpan De Juàrez, Mexico Phone: / Fax (+52) 55/53002326 Website: www.woma.mx E-mail: gerhard.kohler@woma.mx

## SOUTH AMERICA

#### COLOMBIA

**EPC** Toscano

Calle 118 N. 19 - 52 Edificio Acocentro 118, Bogodà - Colombia

Phone: / Fax (+57) 1/5204674 Website: www.epctoscano.com E-mail: hugo.toscano@epctoscano.com

Cinematic Do Brasil

Rua Brideiro Jordao n. 861, 04210-000 Sao Paolo, Sp, Brasil

Phone: / Fax (+55) 11/61699595 Website, www.cinematic.com.br E-mail: cinematic@aol.co.br

## NORTH AFRICA

AVAILABLE

## SOUTH AFRICA

#### NIGERIA (GLOBAL BUSINESS LINK LTD)

DREAMGLASS NIGERIA LIMITED

1 Glory cClose, Off Abuloma Road PORT HARCOUT NIGERIA E-mail: dream.glass@yahoo.com

## MAROCCO-TUNISIA-ALGERIA-LEBANON

MR. JAMAL KADDOURA

Shatila Building (3rd Floor, #301), Aradati Street,

Ras Beirut, LEBANON

Phone: 0049/5564/919833 - Fax 0049/5564/999760 (German

Phone: 00212/661/06367; 00212/23319421 (Marocco Office)

E-mail: Kaddoura@gmx.net

## OFF SHORE PLANTS PROJECTS

KEEGAN SPACIALTY ENTERPRISE, INC 10700 Richmond Avenue, Suite 265, Holston,

TX 77042 U.S.A.

Tel. 001/713/9757454 - Fax 001/713/9750040

E-mail: smh@keegansoo.com



IDROKID - IDM IDRODINAMICA MEDITERRANEA

## INTRODUCTION OF IDROJET/IDROKID WORLDWIDE COMMERCIAL NETWORK

## **ASIA**

#### **CHINA**

Dongving Trust Imp & Co. Ltd. 30 Huanghe Road, Dongying, Shandong, 257091 - China Phone: (+86) 131-76621616

E-mail: jianwu\_ge@163.com

Shanghai GaoAo Environmental Protection Technology & Co. Ltd. N.2, Songmi Road. SongJiang District, Shanghai - China Phone: (+021) 67830178 / Fax: (+021) 57836902

E-mail: fudangaofei@163.com

#### **INDIA**

United Engieneering Agencies

3rd Floor, Mathewsons Trade Centre, Near Tvs Showroom Kaloor,

Kochi - 682017, Kerala, India Phone: (+91) 4842539979

Website: http://unitedengineeringagencies.com E-mail: pojnambiar@unitedengineeringagencies.com

#### **ISRAEL**

LAOR ENGINEERING LTD

8, Hanna Senesh Street, Qiryat Tiv'on, ISRAEL Phone: 00972/4/9833566 - Fax 00972/4/9530475

Website: www.laoreng.com E-mail: ori-or@laoreng.com

#### **KOREA - JAPAN**

Sano Trade

Gadong 101-ho, 143 Yanggoj-4ro, Yangchon-eup

Gimpo-si, Gyenggi-do - Korea Phone: (+82) 31//9849571 E-mail. sanotrade@haver.com

## OMAN - BAHRAIN - QATAR - U.A.E.

POWERFLOW MIDDLE EAST (CLE) P.O. Box 28836 Shed No: 13, Street No:06

Industrial No: SHARJAH - UNITED ARAB EMIRATES

Phone: 00971/6/5354627-28 Fax 00971/6/5354629

E-Mail: info@pflome.com Website: www.pflome.com

#### PHILIPPINES - MYANMAR - BRUNEI - VIETNAM - SINGAPORE MALAYSIA - INDONESIA

Klenco (Singapore) PTE Ltd 18 Gul Crescent, Singapore 629527

Phone: (+65) 6/8623388 - Fax (+65) 6/8617575

Website: www.klenco-asia.com E-mail:info@klenco-asia.com

#### **TAIWAN**

THETAGROUP INTERNATIONAL CORP. 1 Floor, n. 133, sector 2 Chang-Sha Street, Taipei TAIWAN R.O.C.

Phone: 00886/2/23930388 Fax 00886/2/23944098

E-Mail: theta92@cm1.hinet.net

#### **EGYPT**

Eta Trade

27 Syris Street - Mohandsseen - Giza - Egypt Mobile 002 0122 343 8020

E-mail. khalifamohammed@hotmail.com

#### **IRAN**

Kadiran Ind. Tools CO., P.O Box; 11365-1989 Tehran - IRAN Phone: 0098/21/6671512 - Fax 0098/21/66726809

E-mail: kaven.hatami@kadiran.com

#### JORDAN - IRAQ - LYBIA - SYRIA - SUDAN

UKHOUSE Limited

414 Harrow Road, London w9 2hu - UK

Phone: (+44) 20/72866166 - Fx (+44) 20/79003169

E-mail: muhy@hotmail.com

#### KUWAIT - SAUDI ARABIA

Hoeit Ltd / Calder Ltd.

P.O. Box 174, Al-Khobar 31952, Saudi Arabia

Phone: + (966) (13) 887-7390 - Fax: + (966) (13) 887-7830

Website: www.heoit.com Email: info@hoeit.com

#### **PAKISTAN**

Nuricon Union(Pte) Ltd.

House n1, street 44, Islamabad, Pakistan

Phone: (+92) 51/2650371 - Fax (+92) 51/2650372

E-mail: fawad-fayaza@nuricon.com

## **RUSSIA**

POWERMASTER LTD

125430, Moscow, 1 yi Mitinskiy per., 15

Phone: (495) 9782574, 5105382 Website: www.powermaster.ru E-Mail: mail@powermaster.ru

#### AUSTRALIA - NEW ZELAND - NEW GUINEA

2 De Laine Avenue Edwardstown SA 5039 - Australia

Phone: (+08) 82972011 - Fax: (+08) 83712610

Website: www.metco.com.au E-mail: sales@metco.com.au

## For further informations contact:

#### Idrojet S.r.l.

Via Luigi Pirandello s.n. - 95040 Piano Tavola (CT) - ITALY Phone: +039/095/7131125 - Fax +039/095/391466 e-mail: idrojet@videobank.it | idrojet@videobank.it

Website: www.idrojet.net

#### Idrokid S.r.l.

Via Luigi Pirandello s.n. - 95040 Piano Tavola (CT) - ITALY Phone: +039/095/7131125 - Fax +039/095/391466

Website: www.idrokid.com e-mail: info@idrokid.com

#### IDM - Idrodinamica Mediterranea by IRS - Idro Rental Service S.r.l.

Via Luigi Pirandello s.n. -

95040 Piano Tavola (CT) - ITALY

Phone: +39/095/7131125 - Fax +39/095/391466

e-mail: idrojet@videobank.it infoline: +39/329/8913983

www.idm-italy.com - www.decoking.net



